KENNEDY CREEK ECO-CULTURE & RESTORATION SITE PLAN
WADNR WWRP #26-1464

SCALE: 1" = 160' 0 40 80 160 320 FEET

N

APR 29 2026

ABLE

RESTORATION PLAN

LEGEND

- Kennedy Creek
- Project Area
- Existing Roadway
- Existing Trail
- BPA Easement
- Proposed Trail
- Proposed Road/Parking
- Restroom
- Art/Wayfinding
- Art/Sculpture
- Existing Viewing Areas
- Proposed Viewing Areas


Proposed native forest garden and camas meadow enhancement area.

Forest floodplain and upland restoration areas (weed control and underplanting with native species)




SQUAXIN MUSEUM
OYSTER BAY
10 MILES TO SHELTON
HWY 101
13 MILES TO OLYMPIA
FOREST OVERLOOK
OVERFLOW PARKING
GATEWAY SCULPTURES
POTENTIAL SHELTER
Image © 2025 Airbus


EXISTING SITE CONDITION

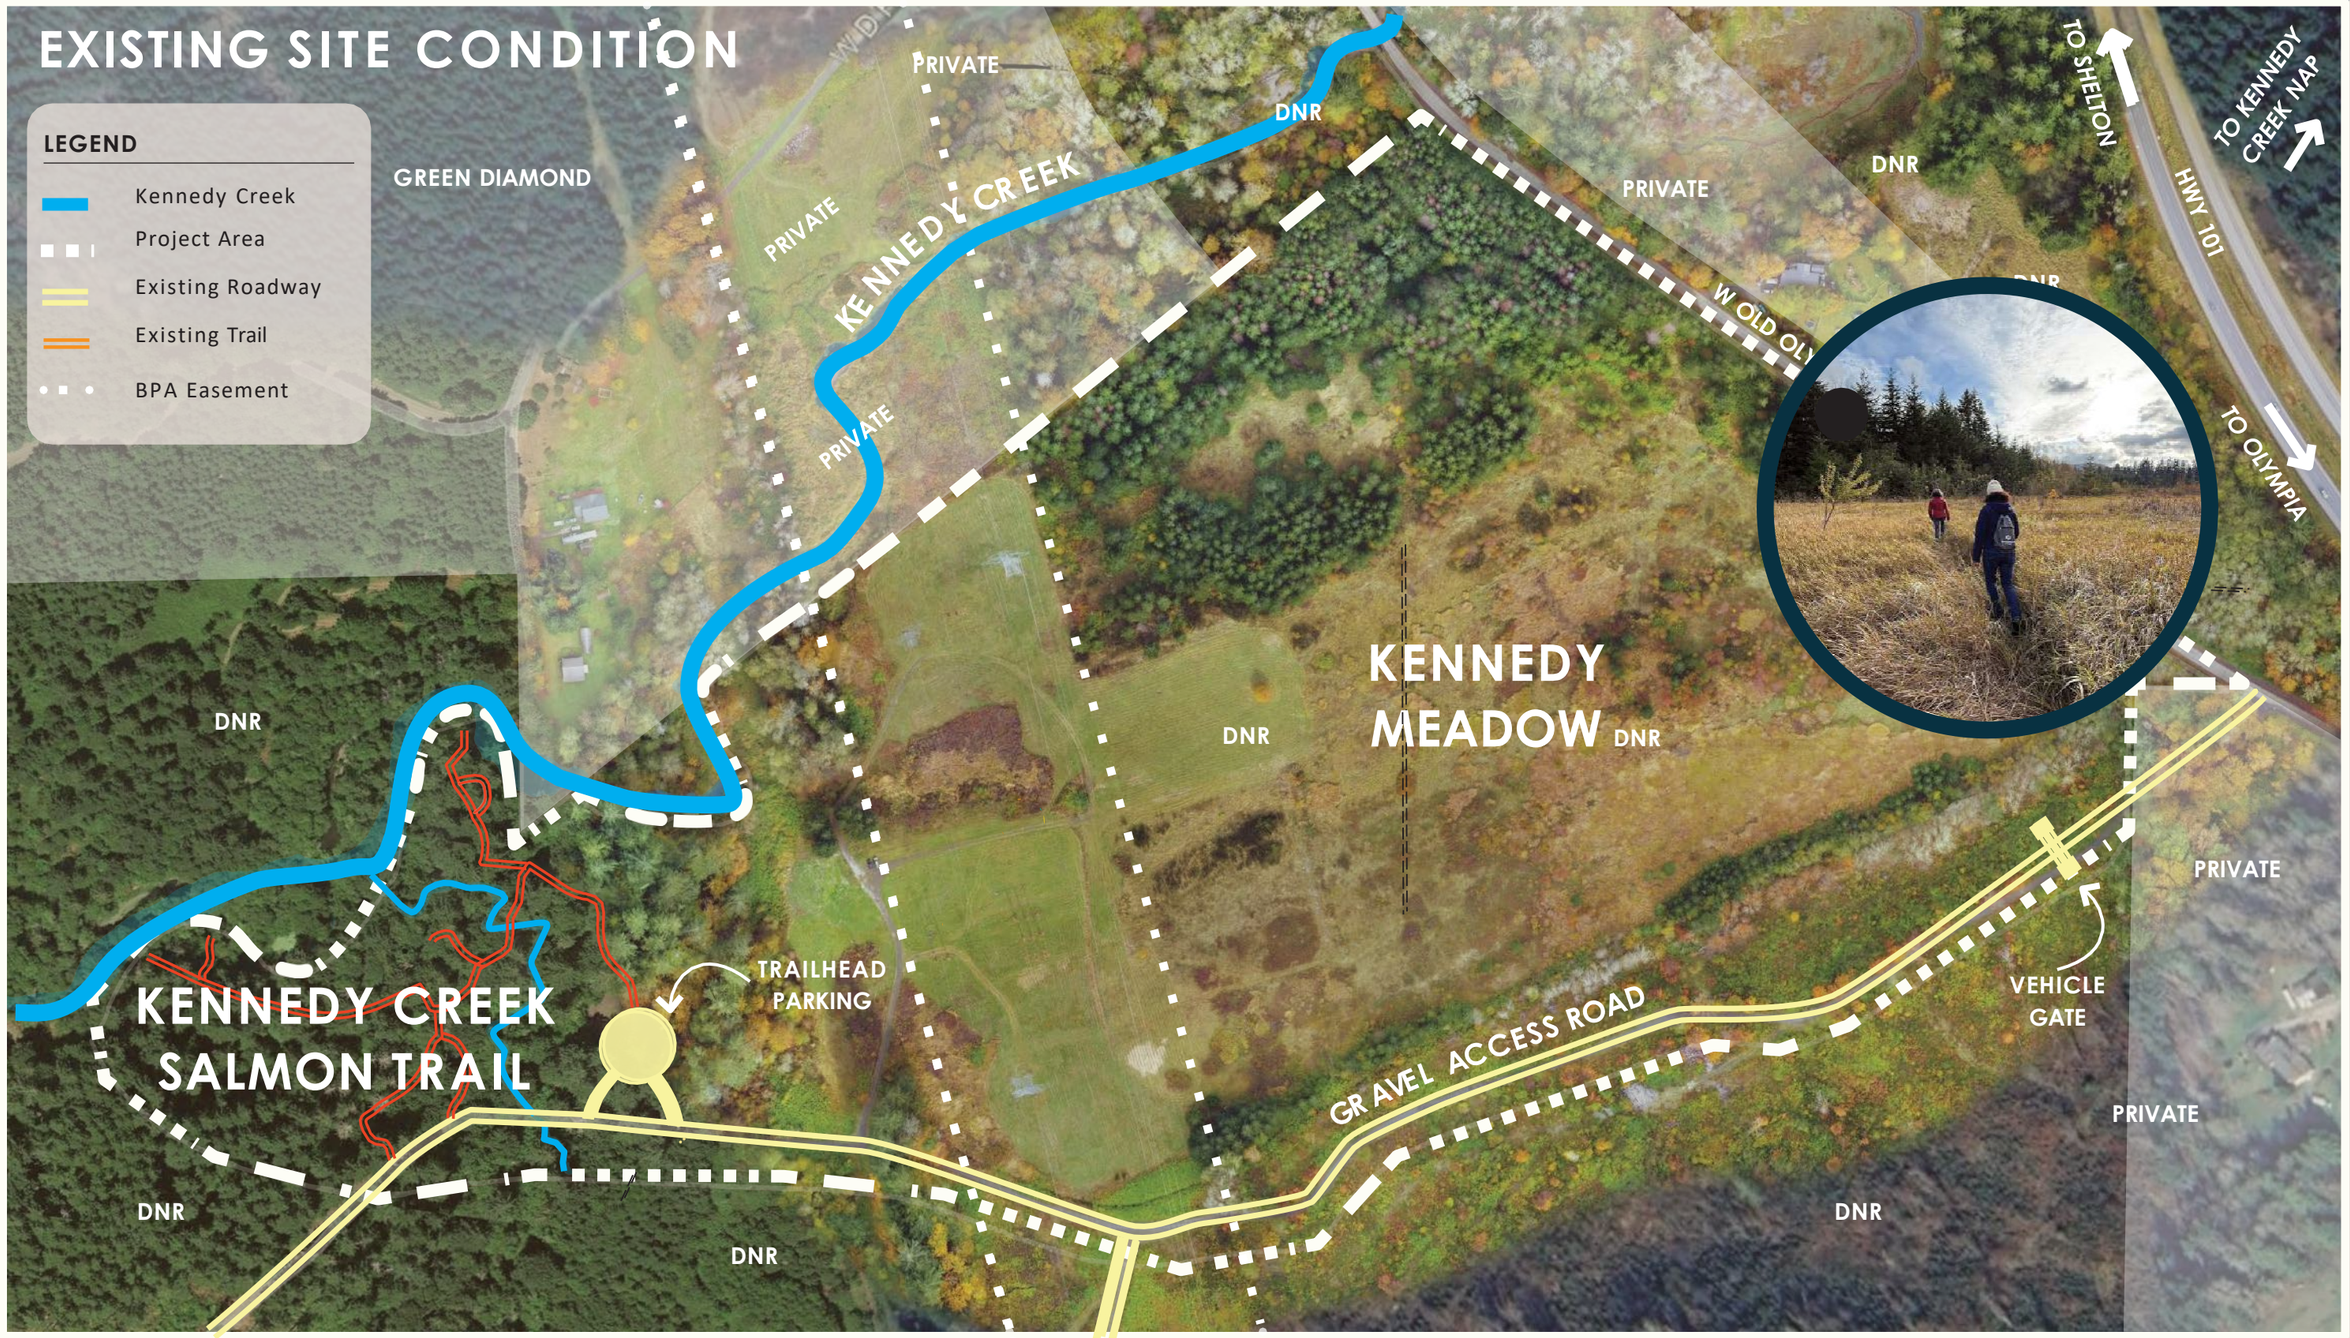

ZONE MAP

LEGEND


1. Kennedy Creek Salmon Trail (12.4 ac.)
2. BPA Easement (14.2 ac.)
3. Meadow (22.0 ac.)
4. Restore Floodplain Forest (29.0 ac.)
5. Gravel Access Road + Buffer (13.2 ac.)
6. Ecocultural Reference Area (32.9 ac.)

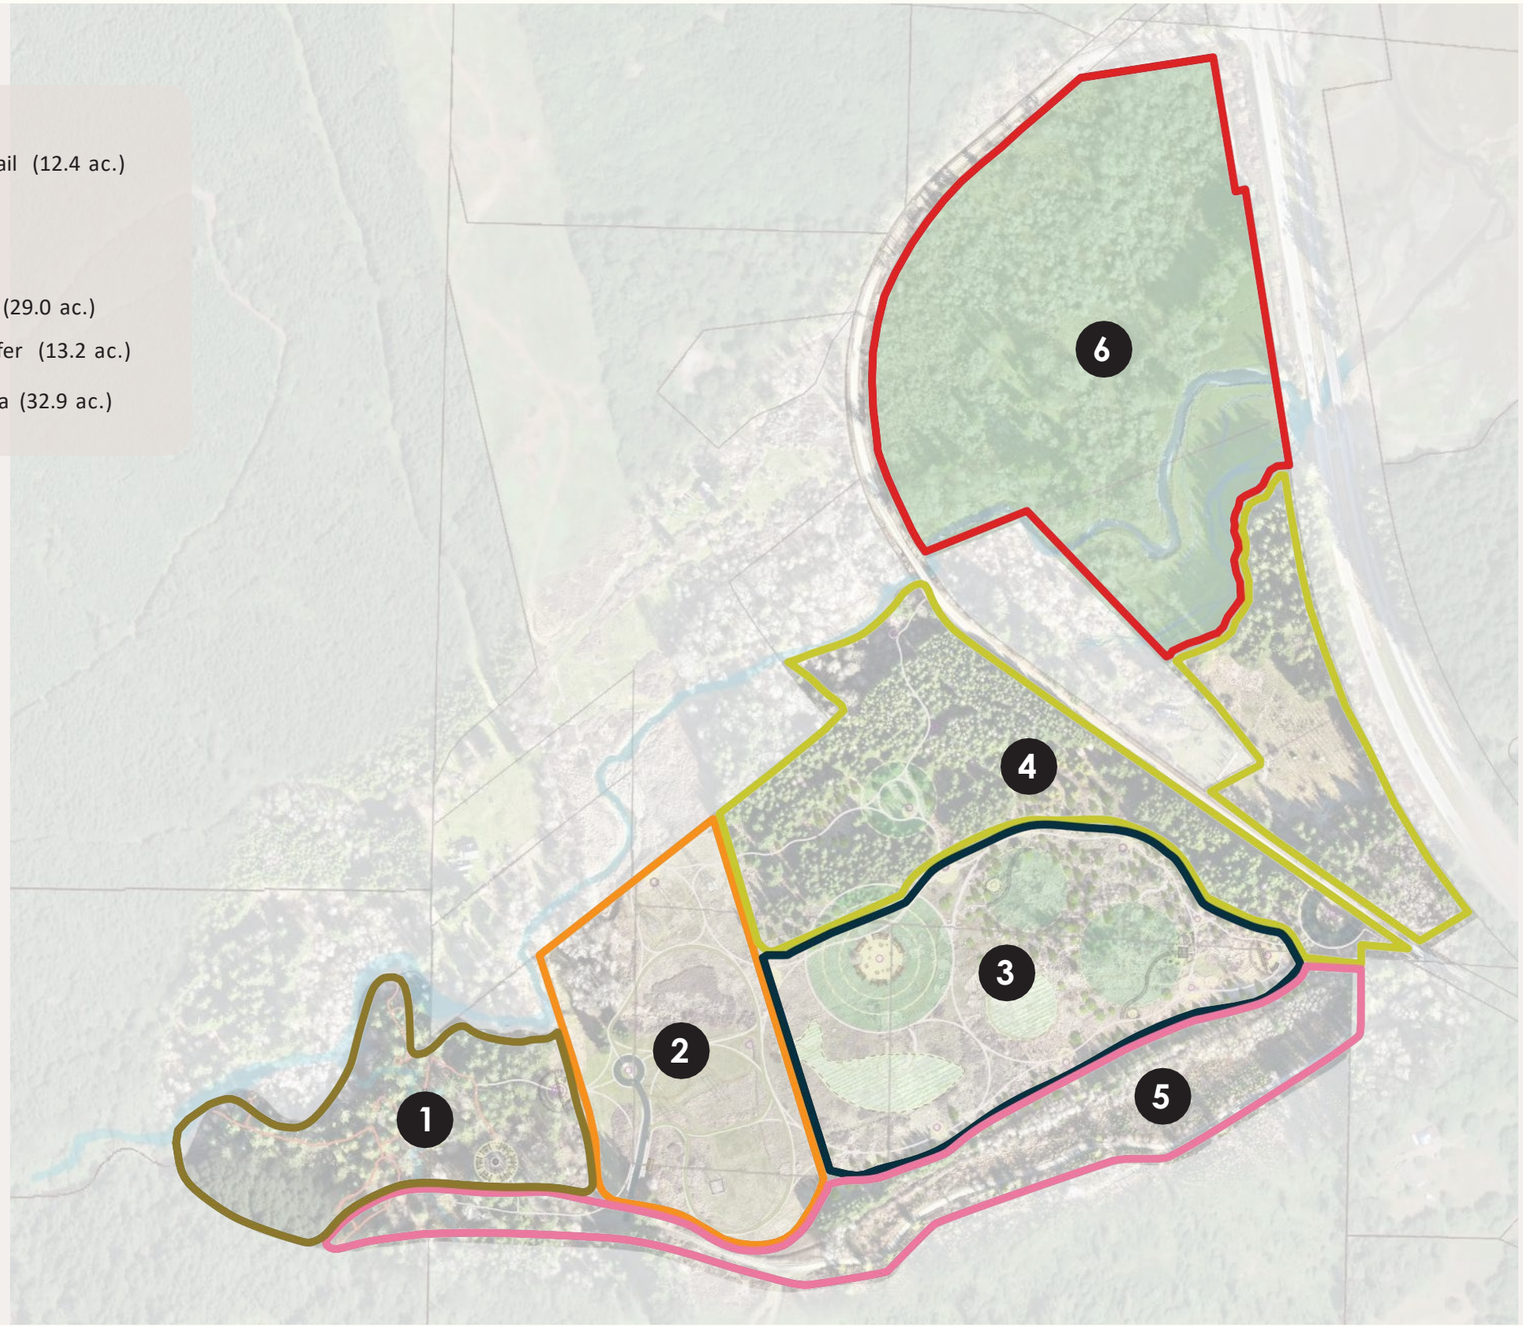

ZONE MAP, ENLARGEMENT

LEGEND

1. Kennedy Creek Salmon Trail (12.4 ac.)
2. BPA Easement (14.2 ac.)
3. Meadow (22.0 ac.)
4. Restore Floodplain Forest (29.0 ac.)
5. Gravel Access Road + Buffer (13.2 ac.)
6. Ecocultural Reference Area (32.9 ac.)

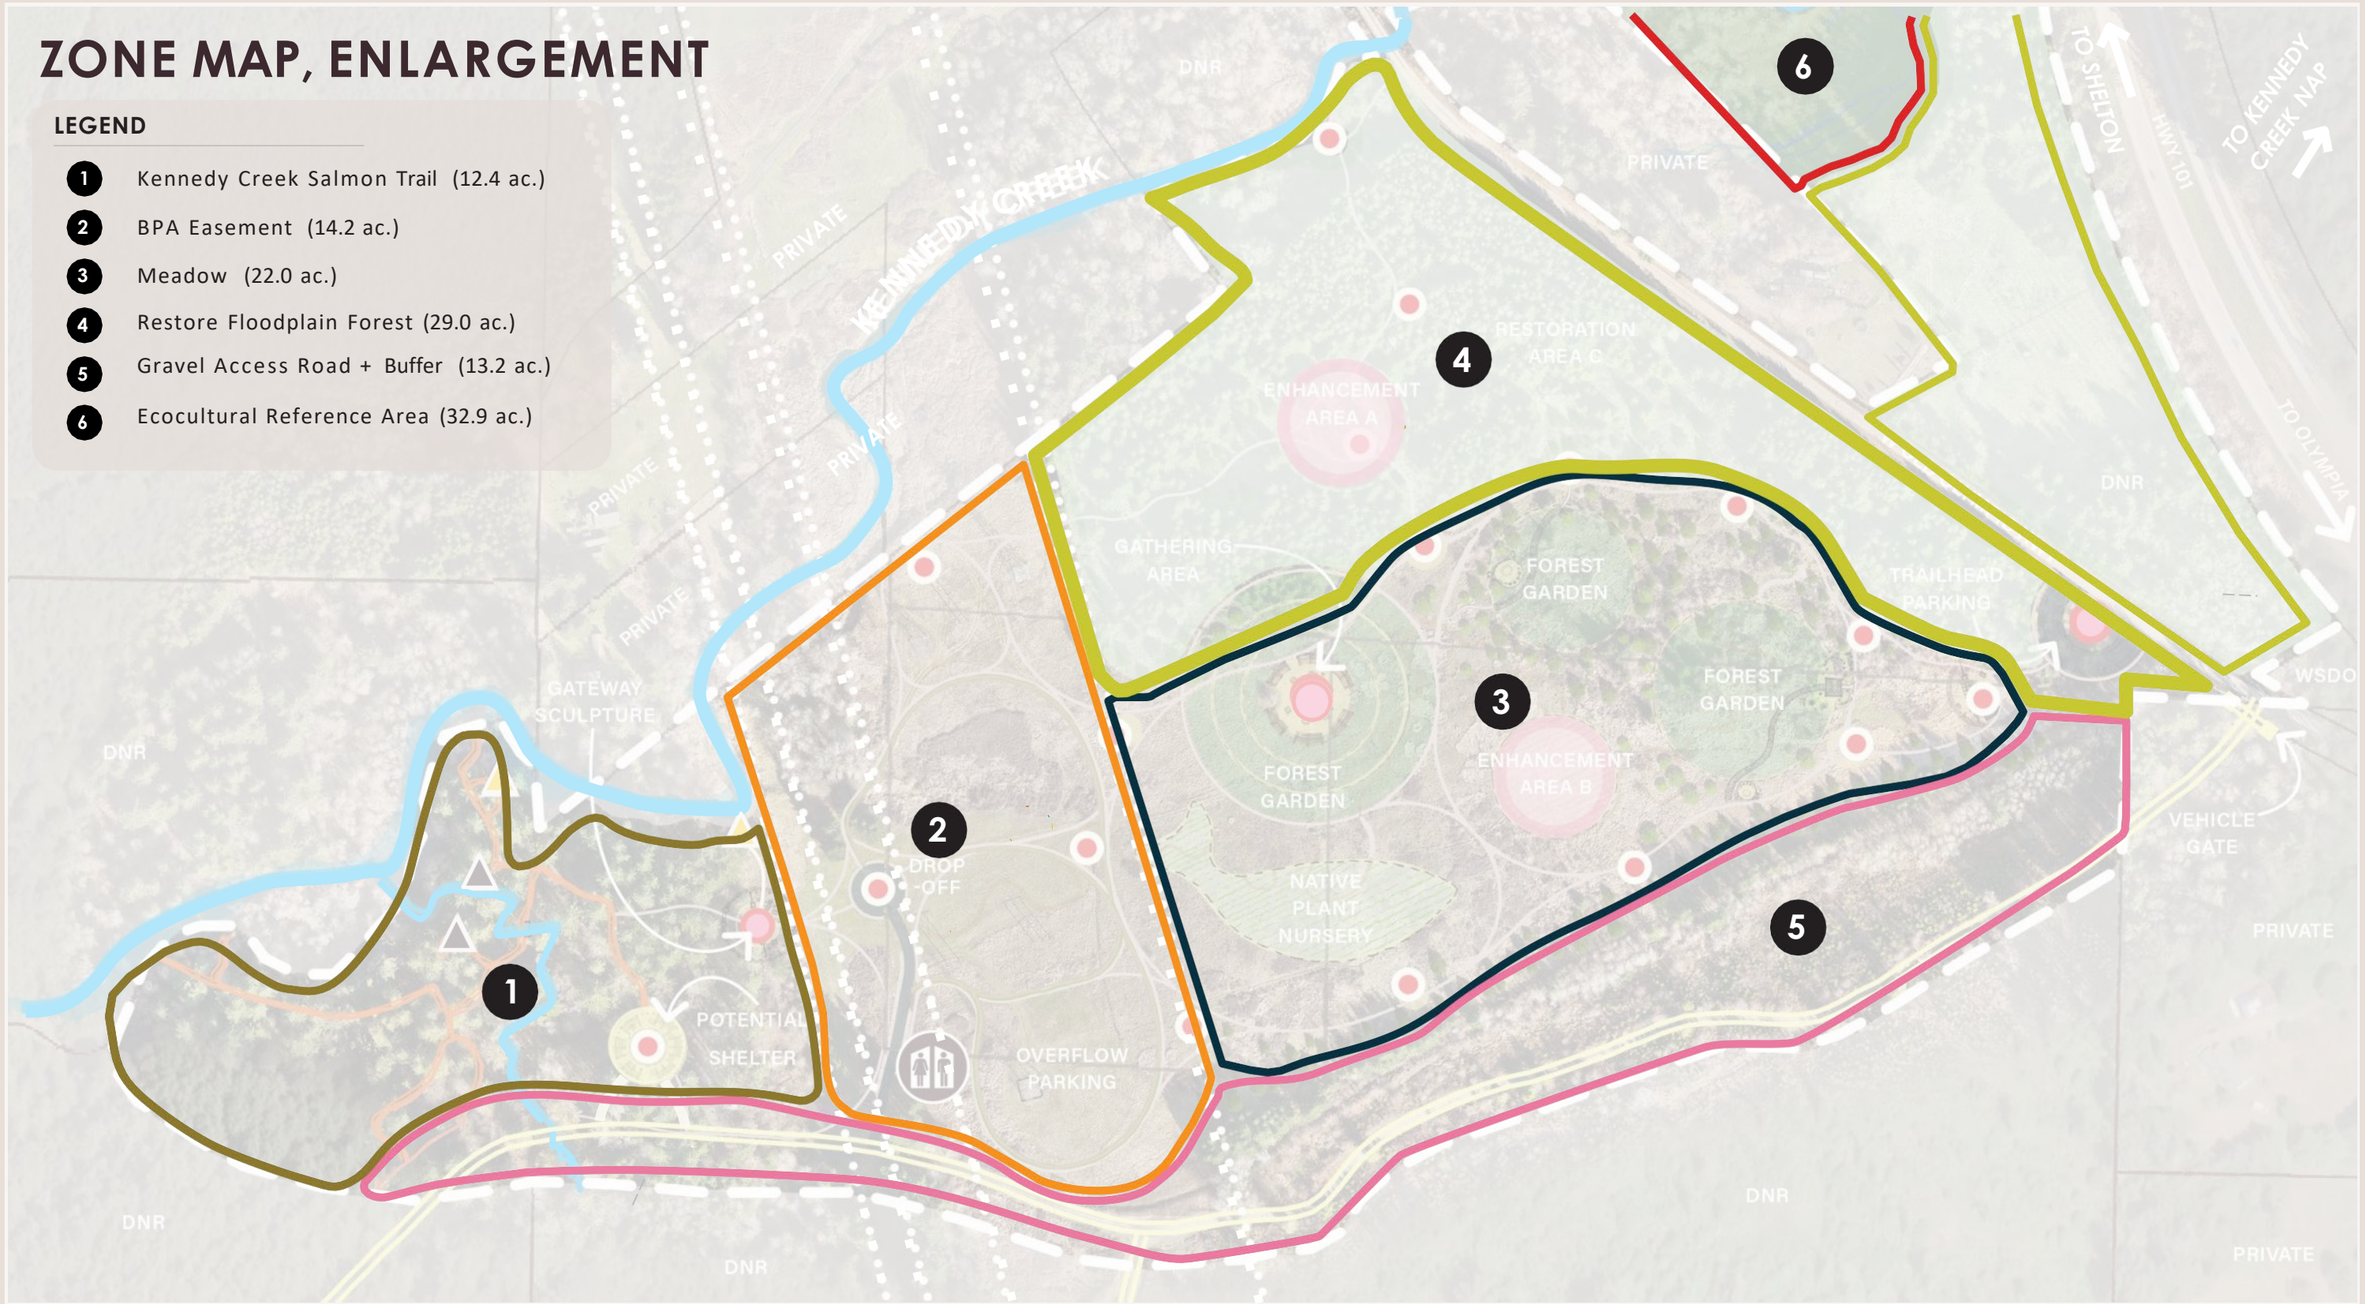

PLANTING + RESTORATION PLAN



1. Areas Planted with Native Forest Garden (2027-project phase = 1-acre: ex. Hazelnut, crabapple, serviceberry sp.) & Camas Meadow species (2027 project phase = 1-acre)
2. Meadow Enhancement Areas
3. Forest Floodplain and Upland Restoration Areas (2027 project phase = 28 acres) control invasive non-native weeds (Scotch broom, English ivy, Himalayan blackberry, holly) & underplant with native species.
4. Potential Native Plant Nursery for site restoration (to be determined in future phases)

EXAMPLE IMAGES





